


ORxxxF52096822Z

Electronic features

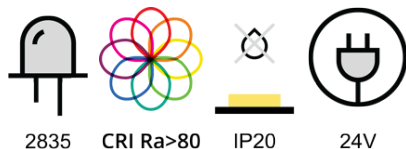

Orizzonte
LED Lighting

www.orizzonteled.com
info@orizzonteled.com

Technical parameters


LED Type	2835 Honglitronic
LED/m	96
Voltage range	24V
Max power (24.0V)	10 W/m
Led color binning	3step MacAdam
Useful life span	50000h
Operating current (single LED)	26mA
Copper thickness	70 µm
Operating temperature	-10°C ~ +50°C
Max led temperature	75°C
IP rate	IP20
Emitting angle	120°



Lighting parameters

CCT	CRI	Rf	Rg	Lm/m	Lm/W	Energy rating
3000K 3step (30s)	CRI Ra>80	81	97	1050	117	F
4000K 3step (40s)	CRI Ra>80	80	92	1100	122	E
6000-6500K (600)	CRI Ra>80	81	93	1150	128	E

Dimensions

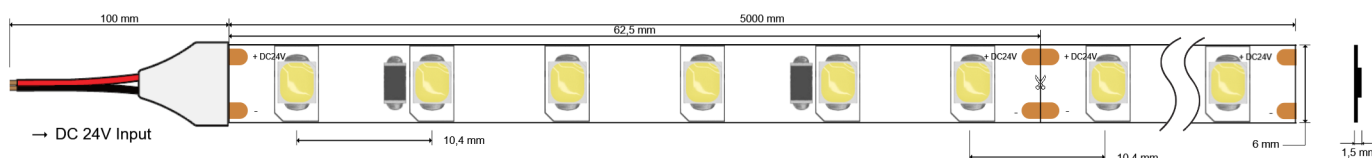

Specifications

PCB width	6 mm
Led strip height	1,5 mm
Cutting unit 24V	62,5 mm (6 led)
LED Pitch	10,42 mm
Reel length	5 m
Adhesive tape	3M 9495LE
Cable cross-section	0,75 mm ²

ORxxxF52096822Z

Product Range

Version	Temperature	IP type	Strip length	PCB colour	Led/m	LED type	Manufacturer No.	Input voltage	Misc.
OR	30s	F	5	2	96	8	2	2	Z
OR	40s	F	5	2	96	8	2	2	Z
OR	600	F	5	2	96	8	2	2	Z

Packaging

Technical parameters	
Carton dimension	520 x 170 x 330 mm
Quantity per carton	50
Net weight	40 g
Gross weight	70 g



5 meters per carton roll



1 roll per carton box

250 m per carton

Orizzonte uses paper boxes and reels for its LED strips to fight for a plastic free world.

Certifications

